Kverneland

2300-2500-2600-2800-5000

MOUNTED PLAIN DISC MOWERS

WHEN FARMING MEANS BUSINESS

Realising the full potential of farming is about growing and developing your business, not only your crop or livestock, but also your profit. Improve productivity and profitability by focusing on the positives and minimising disadvantageous aspects, through strong, dedicated management.

Success springs from determination and clear targets, from laying down the appropriate strategy and allocating correct investments for the future. Quality results require the right ideas and equipment. When there is work to be done, you need the optimal setup and smart solutions that support you towards an easier, more profitable way of working. You need solutions that make tough and demanding conditions less complicated.

MOW

Accurately cut crops, mown at just the right time, is essential for quality forage.

KVERNELAND CUTTERBAR WITH ROUND DISCS
– BUILT TO WORK AS HARD AS YOU!

Round discs
are less susceptible to stone impacts.

Fully welded cutterbar
limiting risk of oil leakage.

Low noise level
due to specially tooled gear wheels.

New hub design
engineered for low power requirements.

Integrated safety system
Excellent driveline protection

Offering maximum strength for demand jobs, the Kverneland cutterbar is built to last. The durable welded cutterbar is designed with a focus on quality and demanding conditions with maximum uptime in mind. The round discs are specially chosen to operate in rough and demanding conditions.

Designed for Outstanding Output

The Kverneland cutterbar has been designed for hard work and to lift your productivity. Several design features support this fact, including the well-established round discs for a clean and aggressive cut and an extremely strong fully welded cutterbar housing which eliminates oil leaks. Furthermore a high oil volume ensures excellent lubrication and cooling during operation. The gear wheels, with their unique rounded design, are tooled to perfection for silent, yet reliable power transmission.

Round disc - specifically designed for stony and rough field conditions.

Durable Welded Cutterbar

The Kverneland cutterbar provides increased uptime with it fully welded design. It has been continuously refined during decades promoting greater productivity.
The fully welded cutterbar with overlapping C-profiles makes for a very rigid and strong design, ensuring very high level of durability. It is designed for years of hard work. The cutterbar has a high oil capacity, which ensures a very low working temperature. This provides an efficient oil cooling and lubrication of the whole cutterbar.

KVERNELAND ROUND DISCS
– A WINNING PERFORMANCE

Round Discs – Outstanding Cut and Perfect Protection

The round discs have always been a known Kverneland hallmark. The unique circular design means that a constant distance is kept between the outer edges of the discs. Stones are expelled immediately before risking blockage, which reduces shock loads on the transmission to an absolute minimum. This in turn improves durability and maintenance substantially.

The Low Noise Cutterbar

The Kverneland cutterbar is renowned by it low noise level during operation. This is thanks to specially tooled gear wheels with round design and long teeth for efficient power transmission – convenient during a long and busy working day. The long curved gear wheels run smoothly in oil and provide lots of power transmission with little slack. The risk of the gearwheels "catching" on the corners is minimised by the special Kverneland "round" design, which in turn reduces wear and noise.

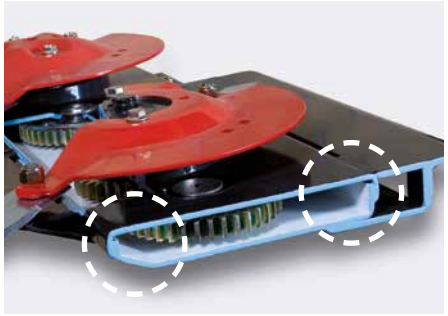

Fully welded cutterbar with overlapping C-profiles for a very strong and stiff construction.

Low noise level thanks to specially tooled gear wheels with round design and long teeth for efficient power transmission.

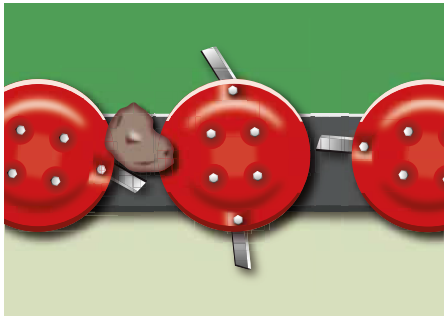

Round discs will immediately reject foreign obstacles. Shock loads on the cutterbar are diminished.

Next generation Kverneland hubs provide more efficient transfer of power and reduced power consumption.

Kverneland ProFit - For Quick Change of Knives

With the Kverneland ProFit quick knife change system, maintenance of the cutting ability is easy. The knives are changed by a simple operation using the special lever - delivered with the ProFit package. The lever is placed around the bolt, the spring is pushed down easily by turning the lever and the knife is ready to be replaced by a new one. Kverneland ProFit is designed for standard discs and can therefore be fitted on all existing cutterbars.

PROFIT

Kverneland
Kverneland
Kverneland

NONSTOP BREAKBACK
- KEEPING CUTTERBARS RUNNING

Protection of the Cutterbar

Kverneland 2500, 2600, 2800 and 5000 series models are all fitted with a NonStop BreakBack system to protect the cutterbar. The integrated NonStop BreakBack system will protect the cutterbar from foreign obstacles.

No Need to Stop - No Time Lost!

If an obstacle is hit in the field the mowing unit will swing backwards and up. This gives maximum protection of the cutterbar.

Effortless Protection

There is no need to stop - or even to reverse the tractor to get the mowing unit into working position again. When engaged the spring loaded design ensures that the NonStop BreakBack system automatically returns the cutting unit to its´ original working position.

If hitting an obstacle the NonStop BreakBack system will be activated...

...and swing the machine backwards and over the obstacle...

...and then return it to the original working position.

MAXIMIZING EFFICIENCY
– GROWING PROFITABILITY

1 Eco-Friendly Solution
Wide working width with low input requirements. Up to 9.5m working width with only 150hp needed.

2 NonStop BreakBack
Ensures maximum protection of the cutterbar if hitting a foreign obstacle.

3 Transport Position
The mowing unit folds above 90°, well behind the tractor, for safe transport.

4 Hydraulic setting of ground pressure
Optional On-the-Go hydraulic adjustment of ground pressure. Simple and easy!

5 Integrated Vertical Parking Stand
Safe and sure-footed storage of the mower. Storage width below 3.0m.

6 Two Mounting Options
Optimal overlap due to two possible mounting positions of cutterbar on suspension arm.

Parking, Safe and Sure-Footed

With the integrated parking device, storage of the 5087 M or 5095 M is made easy and convenient, requiring a minimum of space during winter storage. They are firmly parked on a strong and stable parking foot, bringing total height below 4.00m.

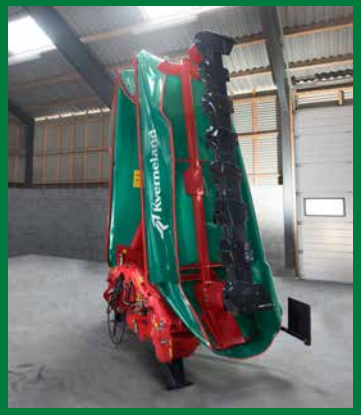

Smart Mowing

The 5087 M-5095 M is an eco-friendly, energy saving solution able to work on tractors with as little as 120hp. The low weight of only 1315-1385kg, together with the ideal weight distribution that butterfly combinations offer, give the optimum combination of low power requirements, low weight and high efficiency.

Maximizing Both Efficiency and Profitability

The combination Kverneland 5095 M paired with 2832 F gives you a solution with 9.50m working width, requiring as little as 150hp - perfectly matching the available tractor capacity of most farmers.

Packed With Features

Designed to match the needs of large-scale mowing, these mowers are packed with features to meet these demands. The centre suspended mowing units, in combination with the round discs, offer unmatched mowing performance.

Work Smarter on the Go

This optional feature provides easy and simple setting of ground pressure on the 5087 M and 5095 M series machines. For greater operator comfort ground pressure of the large suspension spring is set hydraulically from the tractor cab. Easy to adjust, even on the go.

It is in fact a very simple and clever solution to an important challenge in optimizing the mowing job. On the hydraulic version the tension on the large suspension spring, which controls the ground pressure, is adjusted hydraulically, to increase or lower pressure.

The chosen ground pressure level is conveniently registered from the easy-to-read scale.

Accurate setting of ground pressure adds to significantly better working result and reduction of fuel consumption, as a mower with correct ground pressure is easier to pull, requiring less power and fuel.

Hydraulic on-the-go setting of ground pressure (optional).



1. Two mounting positions of cutterbar on suspension for optimal overlap.

2. NonStop BreakBack system with auto reset.

3. Two adjustable springs provide best possible ground adaptation.

MANAGE MOWING EASILY

Two Mounting Options

Kverneland 5087 M-5095 M can be adjusted for optimal operation according to different circumstances, such as field contours or working width of the front mounted mower. To ensure optimal overlap between front and rear units, the mowing units can be mounted in two positions on the suspension arm. This also gives you an option of wider overlap in hilly conditions, lessening the need for SideShift equipment.

Excellent Ground Adaptation

Kverneland 5087 M-5095 M is fitted with two adjustable ground pressure springs, making setting of the best possible ground pressure easily done, to match the needs of each specific mowing operation.

NonStop BreakBack

The Kverneland BreakBack device protects the cutterbar from foreign obstacles. If hitting an obstacle, the BreakBack device will swing the cutting unit backwards and over the obstacle, automatically returning the mower to working position, once the obstacle has been passed.

Vertical transport position for good weight distribution.

Vertical Transport Position

For transport the mower folds into a compact position well behind the tractor. The folding design ensures that the weight is distributed evenly, with the weight of the mower close to the tractor. Endguards are foldable to further limiting transport height, which is below 4.00m and transport width is limited to 3.00m.

Ample clearance of swaths during headland turns.

Headland Turns

When turning on headlands the hydraulic cylinder, which is also used when going into transport position, ensures ample clearance to the swath, so they remain undamaged.

Centre suspended design for excellent ground following ability.

Centre Suspension

The mowing units are centre suspended offering an even weight distribution across the complete mower width. Faster and more precise adaptation to ground contours is also achieved due to the centre suspended design. The benefit is less skid wear and optimum protection of the stubble.

GROUND FOLLOWING
REINVENTED

1 Excellent Ground Adaptation
Outstanding adaptation ability with a 640mm vertical and 17° horisontal adaptation ability.

2 NonStop BreakBack
Ensures maximum protection of the cutterbar if hitting a foreign obstacle.

3 Low Weight and Power Requirement
The low weight design guarantees minimized input requirements, starting as low as 35hp.

4 2-Speed PTO
Two PTO speeds can be chosen. Standard 1000rpm or 750rpm for reduced fuel consumption.

5 2832 FS – Swathing Or Widespreading
Offers 3 different swath widths of 1.0, 1.15 and 1.3m as well as 2.2m widespreading.

6 Direct Coupling
Direct coupling to tractor - no additional A-frame needed.

To ensure best possible pattern of movement, the mowing unit moves independently from the front linkage.

Outstanding ground following ability!

Remarkable Adaptation Range

Kverneland 2800 F and 2800 FS models are exceptionally well adapted to varying field conditions and contours. At standard settings the cutterbar has a remarkable 430mm upwards and 210mm downwards adaptation range, in combination with a transverse pivoting range of 17°. This wide spectrum allows the machine to follow the ground in all conditions without overloading the cutterbar.

Easy Operation of the Machine

Correct setting of the machine is very user-friendly. The front linkage is set to a specified height and the mower unit is operated by a separate hydraulic cylinder integrated in the suspension. Ground pressure is provided by two springs.

Unrestricted Movement

There is no wearing on the front linkage of the tractor, as the integrated suspension design does not require a flexible front linkage - the relative movements are done by the machine itself. This also means that you are not restricted by the limited flexibility typically originating from the front linkage.

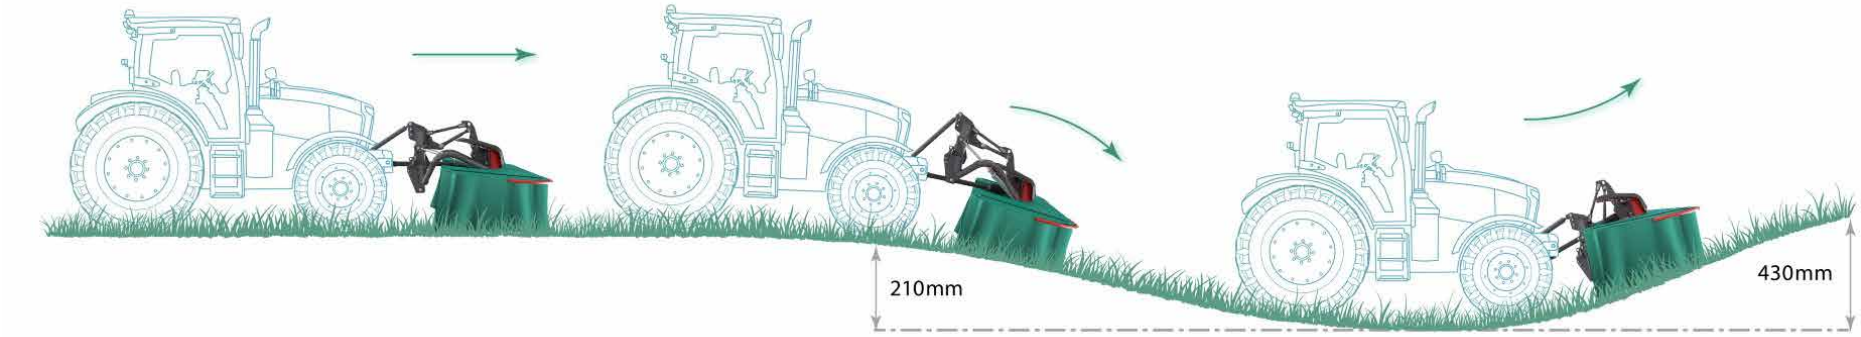

An adaptation range of 430mm upwards and 210mm downwards ensures untroubled ground following.

EFFORTLESS OPERATION
SIMPLE HANDLING

Enhanced for Superior Performance

The 2800 F series is engineered to excel in the toughest conditions, featuring an ultra-responsive suspension system while maintaining dependable reliability during operation. Performance-enhancing adjustments are quick and intuitive, making the 2800 F series highly user-friendly. Its compact design effortlessly connects to the tractor's linkage, eliminating the need for an extra A-frame.

With a working width range of 2.80-3.20 and 3.60m and a lightweight design (operating weight of just 790-900kg), the 2800 F series can be operated with as little as 35hp. Featuring excellent ground adaptation, simple operation, and a streamlined design, the 2800 F series is the perfect choice for even the most demanding mowing tasks.
It pairs ideally with rear-mounted mowers and loader wagons for versatile applications.

Excellent service access to the cutterbar, which is an advantage compared to most other machines with a flexible suspension. Even when the machine is raised, you can open the entire front cover.

Belt tensioner is easily accessible for checking and adjustment.

Direct coupling to tractor – no additional A-frame needed.

Good view of the machine from the tractor cabin. Road mirrors available as option.

Quick and easy access to V-belts.

Trouble-Free Mowing

The highly responsive kinematics incorporated into the headstock design will intervene to protect the mower when encountering even the smallest obstacles during operation. To offer maximum protection and lessen the shock loads on the complete machine, the cutterbar will move backwards and up, letting any obstacle pass without risk of damage.

Two-Speed Driveline

Standard PTO speed is 1000rpm. However by simply switching driveline pulleys, 750rpm for reduced fuel consumption can be achieved. This makes it possible to maintain the correct PTO speed, but using reduced engine revs, creating an opportunity for lower fuel consumption – an innovative solution to the problem of front PTO systems not offering an economy speed.

CROP QUALITY NO MATTER
THE CONDITIONS

2832 FS Covers it All

The first front disc mower with an actively driven swath former, designed for both narrow swathing and widespreading. Changing between different swath widths is intuitively done in very little time – no tools required! Simply release the locks on each swath board and swipe them to the requested swath width. For widespreading the boards are released and positioned on top of the mower.

With the option of 3 different swath widths (1.00, 1.15 and 1.30m) and widespreading up to 2.20m, this machine offers exactly the flexibility that most farmers are looking for. Narrow swaths that will go well in-between the tractor wheels, or widespreading for fast wilting of crop.

A Machine for Any Application

Kverneland 2832 FS will work well in a number of different settings. In combination with rear mounted mowers, as a single machine, or joined up with a loader wagon.

With widths as narrow as 1.00m, the swaths will pass between the wheels of even smaller tractors, leaving an untouched swath that is easily picked up by the loader wagon.

The adjustable swath width allows you to set the correct width in accordance with crop and weather conditions. As the crop is drying during a long day of mowing, the swath width can be adjusted from being narrow at the start of the day to being wider during the day, to ensure correct and even moisture level in the crop.

Preparing a Clean and Airy Swath

The actively driven auger guides even high volumes of crop towards the centre of the mower, leaving a nice, box-shaped swath. Crop is immediately moved away from the discs, inviting for excellent cutting performance.

Each side of the auger is working in combination with a guide plate that efficiently transports the crop to the middle, without any crop loss or contamination often seen from systems applying swath wheels.

Kverneland 2832 FS does not just move two swaths next to each other like traditional drum mowers, but places the crop into one even and airy swath, significantly speeding up the drying process.

Excellent Adaptation Range

Just like all 2800 F models, 2832 FS shows an impressive adaptation range of 430mm upwards and 210mm downwards, ensuring excellent cutting quality in even very difficult circumstances.

Fuel Efficient Solution

Kverneland 2832 FS is driven from the top by a simple but efficient driveline. A small gearbox connected to the main gearbox drives the auger via a V-belt. This design combined with the auger design means that an additional power requirement of only 5hp is needed to run the auger. In total the auger, including driveline, adds approximately 115kg to the mower, leaving total weight as low as 930kg and a power requirement of only 45hp.

Kverneland 2832 FS is the perfect match for a loader wagon.

Swath width is easily changed by simply unlocking the swath plates and sliding them to the requested position.

The auger is driven by a small gearbox with an additional power requirement of only 5hp.

Actively driven swath former, producing even, box-shaped swaths.

SIMPLE DESIGN
QUALITY OUTPUT

1 Centre Suspension
Even weight distribution across entire mowing width and constant, fast and precise adaptation to ground contours.

2 Engineered Simplicity
Clean and uncomplicated suspension design ensuring low weight and minimum power requirement.

3 NonStop BreakBack
Ensures maximum protection of the cutterbar if hitting a foreign obstacle.

4 2-Speed Gearbox
Easy adaptation to different conditioning requirements. Rotor speed is easily changed by switching pulleys.

5 Safe Transport Position
Above vertical position inside tractor width for perfect balance during transport.

6 Hydraulic Setting of Ground Pressure
Optional On-the-Go hydraulic adjustment of ground pressure. Simple and easy!

When encountering an obstacle the NonStop BreakBack system protects the cutterbar by swinging it back and up.

These machines can be operated with either 540 or 1000 rpm without additional accessory.

The large compensating spring ensures excellent flotation across the full mower width.

Extensive Working Width – Low Weight

Kverneland 2800 M rear mounted range boast an extensive 2.80-4.00m working width with corresponding weights of only 805-950kg, which means the machines can be operated with tractors starting from only 50hp. Paired with the Kverneland 2828 F or 2832 F front mounted machine the joint working width is up to an amazing 6.80m.

The large compensating spring in combination with the centre mounted design provides perfect flotation of the complete cutterbar.

NonStop BreakBack Solution

To offer maximum protection of the cutterbar, the 2800 M machines are fitted with the Kverneland NonStop BreakBack solution. When encountering an obstacle the BreakBack will swing the machine backwards and over the obstacle, returning to its´ original working position, once the obstacle has been passed.

Adjustable PTO Speed

Kverneland 2800 M comes factory fitted with the option of being operated with either 540 or 1000rpm. It requires no additional accessory. All that is needed is simply to turn the main gearbox on the suspension 180°.

Work Smarter on the Go

This optional feature provides easy and simple setting of ground pressure. For greater comfort for the operator the ground pressure of the large suspension spring is set hydraulically from the tractor cab. Easy to adjust, even on the go.

It is in fact a very simple and clever solution to an important challenge in optimizing the mowing job. On the hydraulic version the tension on the large suspension spring, which controls the ground pressure, is adjusted hydraulically, to increase or lower pressure. The chosen ground pressure level is conveniently registered from the easy-to-read scale.

Accurate setting of ground pressure adds significantly to better work result and reduction of fuel consumption, as a mower with correct ground pressure is easier to pull, requiring less power and fuel consumption.

Work Smarter on the Go!

Parking stand for easy and compact storage (optional).

CLEAN, UNCOMPLICATED MOWING

Centre Pivot Suspension

The 2800 M machines are centre suspended to give an even weight distribution across the complete mower width. Faster and more precise adaptation to ground contours is also achieved because of the centre suspended design. The benefit is less skid wear and optimum protection of the stubble.

Transport Position

Kverneland 2800 M is folded hydraulically into a vertical transport position up to 125°. The low gravity point ensures excellent weight distribution, with the weight of the mower close to the tractor. Additionally the weight is evenly distributed on each side of the mower. Transport height is limited, so passing through narrow gateways or under bridges is no problem.

Centre suspended design for even weight distribution across the complete mower width.

Adjustable For Any Tractor

The linkage pins on 2800 M can be adjusted for four different positions, ensuring compatibility with any tractor. Another advantage is that the overlap in combination with a front mounted machine like 2800 F series can be optimized, to ensure that the complete working width on both machines is utilized.

Furthermore the mowing unit can be mounted in two different positions on the suspension for easy setting of optimal overlap.

Two mounting options for optimal overlap with a front mounted machine.

Lifting on headlands via hydraulic cylinder – ample ground clearance.

Vertical transport position up to 125°.

To avoid driving on mown crop, a swath forming kit is optionally available for 2836 M and 2840 M.

QUALITY MOWING
THROUGH HYDRAULICALLY SUSPENDED DESIGN

1 Centre Suspension
Even weight distribution across entire mowing width and constant, fast and precise adaptation to ground contours.

2 HydroFloat - Hydraulic Suspension
Easy and precise setting of ground pressure, for superb adaptation in different conditions.

3 NonStop BreakBack
Ensures maximum protection of the cutterbar if hitting a foreign obstacle.

4 Direct Drive
Direct and precise power transmission into the first disc. No inner skids, and an efficient use the cutterbar.

5 Headland Lift
Fast lifting without activating the 3-point linkage of the tractor, leading to less wear on tractor and transmission.

Hydraulic Centre Suspension.

Flexible mowing on slopes.

Headland lift via hydraulic cylinder.

Excellent Power Transmission

Kverneland offers a centre mounted plain disc mower with a hydraulically suspended design in working widths of 3.20, 3.60 and 4.00m. The 2500 MH series is fitted with the fully welded slim cutterbar for improved cutting performance. Special efforts have been made to make daily operation as easy, straightforward and effective as possible.

Hydraulic Centre Suspension

The machines are suspended in the centre of gravity offering several advantages. The advantages include equal ground pressure and fast adaptation to varying field contours. These features facilitate a cleaner cut, better protection of the stubble and in addition an improved fuel economy, as well as less skid wear.

Easy lift on headlands without activating the 3pt linkage – sufficient clearing under the cutterbar.

Flexible Mowing on Slopes

The new design of the suspension, with an extra pivoting point, allows greater flexibility in the working range, enabling mower operation at 15° upward or downward angles. This offers great advantages when working on hillsides or along ditches, and also makes it easier to manoeuvre the machine on headlands.

Easy Lift on Headland

Lifting of 2500 MH series is easily done via a hydraulic cylinder, which means there is no need to activate the tractors 3pt linkage. As the PTO stays in the same position, vibrations in the transmission are eliminated, implying less wear on tractor and machine.

Headland Turns

Along with the easily adjustable and precise setting of ground pressure, the hydraulic suspension also ensures that 2500 MH machines offer sufficient clearing during headland turns, so that current swaths remain undamaged.

Excellent Power Transmission

The 2500 MH series is equipped with a direct drive system from the gearbox to the first disc. This ensures an efficient power transmission and allows you to take full advantage of the whole width of the cutterbar.

Safe and Easy Transport

For transport the mower is swung hydraulically into horizontal position behind the tractor. Fast and easy conversion, with no need to leave the tractor. With the narrow and very low position, safe transport is ensured.

LET'S TALK
SERIOUS MOWING!

The 4m Solution
The Kverneland 2540 MH is truly a high performance mower with its' 4.00m working width and 10 round discs.

Hydraulic Suspension
The Kverneland 2540 MH is designed with a unique hydraulic suspension system, the Kverneland HydroFloat, offering improved ground adaptation.

Thanks to this hydraulic suspension system the ground pressure of the mowing unit is easily adjusted, to allow adaptation to varying field conditions ensuring an even cutting height.

The ground pressure is continuously and quickly adaptable by using the lever on the suspension.

HydroFloat

Hydraulic suspension for precise setting of ground pressure and superb adaptation.

Centre suspension for even weight distribution and outstanding adaptation.

Easy lift on headlands without activating the 3pt linkage of the tractor.

Breakback devise to protect the cutterbar against foreign obstacles.

For transport the mower is swung hydraulically into horizontal position behind the tractor. Fast and easy conversion with no need to leave the tractor.

To avoid driving on mown crop, a swath forming kit is optionally available for 2536 MH and 2540 MH.

Headland Turns

Turning on headlands is made easy with the Kverneland 2540 MH. The mower is lifted without activating the 3pt linkage of the tractor which needs no adjustment in the field. When working in the field the Kverneland 2540 MH offers good clearance, which prevents damage to the swath during operation.

The 10 disc cutterbar features a direct drive from the gearbox to the first disc, which efficiently reduces power wastage and takes full advantage of the whole working width of the cutterbar.

Hydraulic lift of the mower unit without activating the tractor's three-point mounting.

FLEXIBLE SUSPENSION
– EASY OPERATION

1 Flexible Suspension
Due to the side mounted design, these mowers can operate at 35° upwards or downwards angles.

2 Vertical Transport Position
These mowers are easily folded into a vertical transport position for excellent running characteristics.

3 NonStop BreakBack
Ensures maximum protection of the cutterbar if hitting a foreign obstacle.

4 Headland Lift
Fast lifting without activating the 3-point linkage of the tractor, leading to less wear on tractor and transmission.

5 Fully Welded Cutterbar
Kverneland cutterbar with fully welded, overlapping C-profiles, with no risk of oil leakage.

With the optional swath roller the swath is separated from the uncut crop.

For extremely hilly conditions an optional hillside equipment is offered.

Ground pressure is easily set by adjusting the compensating spring.

Easy access to the cutterbar for inspection and maintenance.

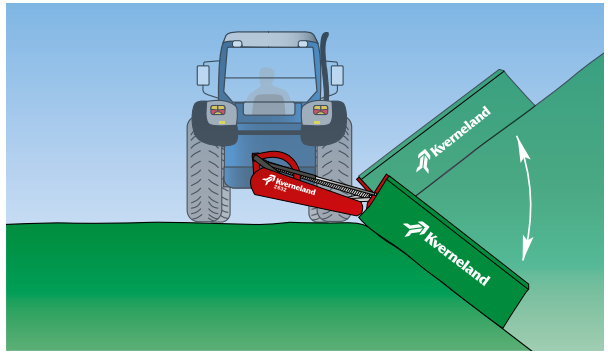

Kverneland 2600 M series can pivot 35° up and down without any adjustment.

Flexible Suspension for Extreme Uneven Field Conditions

Kverneland 2600 M series offers a very flexible suspension giving perfect ground contour following. This ensures that the mower is able to adapt to extremely uneven field conditions, giving the best mowing result. The linkage of Kverneland 2600 M ensures that the mower is capable of working on steep angles or in hilly conditions.

Adjustable Lifting Pins

Kverneland 2600 M series offers a very easy mounting on the tractor. When the machine is parked the lifting pins are horizontal. The linkage pins are easily adjusted to match the tractor width, which enables the mower to cut to its´ full working width.

Easy adjustment of ground pressure

A large compensation spring ensures the best possible support of the cutterbar of Kverneland 2600 M series. This gives optimum ground pressure along the entire cutterbar, even under differing conditions and contours. The ground pressure is easily and accurately set by adjusting one spring.

High output at low power requirements.

On headlands the mower is lifted without activating the 3pt linkage.

For transport the mower is positioned hydraulically into a vertical transport position.

COMPACT DESIGN
– RELIABLE PERFORMANCE!

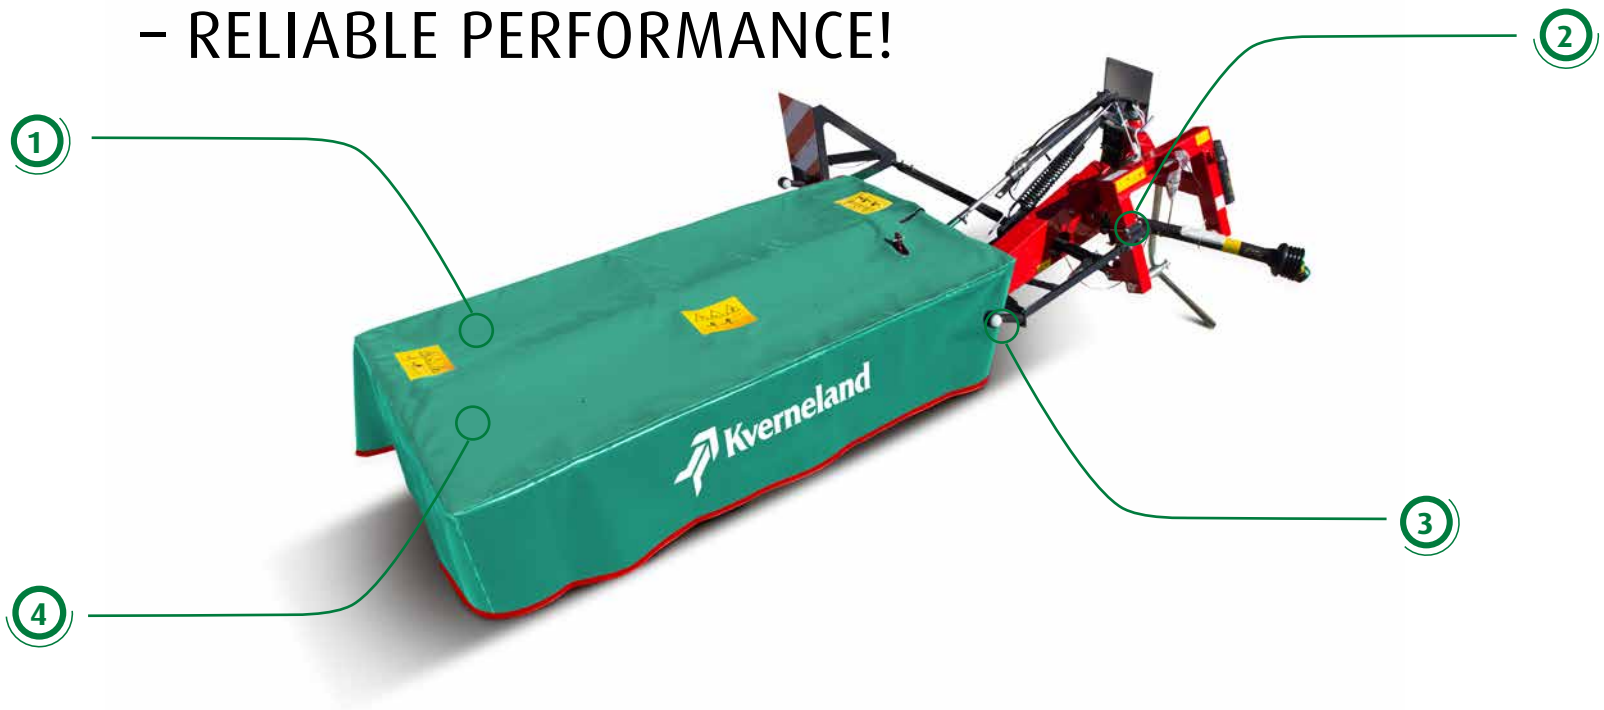

1 Flexible Working Angles
The flexible suspension allows mowing at 15° upwards and 45° downwards angles respectively.

2 Vertical Transport Position
These mowers are easily folded into a vertical transport position for excellent running characteristics.

3 Spring Loaded BreakBack
Ensures maximum protection of the cutterbar if hitting a foreign obstacle.

4 Headland Lift
Mower is lifted via the hydraulic cylinder – no need to activate the 3 point linkage.

The 2300 series machines are folded hydraulically to a vertical position behind.

BreakBack device protecting the cutterbar when encountering obstacles.

Compact Build For Smaller Tractors

Kverneland 2300 series machines are designed for smaller mowing operations. With working widths ranging from 1.65-2.40m and with corresponding weights of 395-470kg respectively, these machines are perfect for farmers looking for a compact mower with low power requirements.

Transport Solution

When in transport, the mowers are folded to a vertical position well behind the tractor for safe transport. The centre of gravity is close to the tractor, which ensures excellent weight distribution and transport stability, even during high speed road transport.

Spring Loaded BreakBack

If encountering an obstacle the spring loaded BreakBack system will swing the mower backwards to protect the cutterbar. Resetting the mower to working position is simply done by reversing.

Mowing at extreme angles.

ORIGINAL PARTS & SERVICE
LET'S FOCUS ON YOUR BUSINESS

MYKVERNELAND
SMARTER FARMING ON THE GO

A personalised online platform tailored to your machine needs

With MYKVERNELAND you will benefit from easy access to Kverneland's online service tools.

Receive first hand access to information on future developments and updates, operator and spare part manuals, FAQs and local VIP offers. All information is gathered in one place.

REGISTER YOUR PRODUCT NOW:
MY.KVERNELAND.COM

TECHNICAL DATA

	Side Mounted Plain Disc Mowers						Centre Mounted Plain Disc Mowers		
Model	2316 M	2320 M	2324 M	2624 M	2628 M	2632 M	2532 MH	2536 MH	2540 MH
Dimensions & Weight									
Working width (m/ft)	1.66(5'5")	2.05(6'9")	2.4(7'9")	2.4(7'9")	2.81(9'3")	3.16(10'4")	3.18(10'5")	3.57(11'6")	3.92(12'10")
Weight, approx (kg/lbs)	395(871)	455(1003)	470(1036)	606(1336)	666(1469)	680(1499)	805(1774)	1040(2293)	1060(2337)
Transport width (m)	1.2	1.2	1.2	1.4	1.4	1.4	<3.0	<3.0	<3.0
Transport height (m)									
Attachment to Tractor									
Linkage (CAT)	2	2	2	2	2	2	2	2	2
PTO (rpm)	540	540	540	540	540	540	540	1000	1000
Min. PTO power req. (kW/hp)	26 / 36	31 / 42	34 / 46	33 / 45	37 / 50	40 / 55	40 / 55	47 / 65	50 / 70*)
Operation									
Number of discs and knives	4 / 8	5 / 10	6 / 12	6 / 12	7 / 14	8 / 16	8 / 16	9 / 18	10 / 20
Number of hydraulic outlets	1 S	1 S	1 S	1 S	1 S	1 S	1 D	1 D	1 D
Mowing angle °	-45/+15	-45/+15	-45/+15	-35/+35	-35/+35	-35/+35	-15/+15	-15/+15	-15/+15
Stubble height (mm)	30-60	30-60	30-60	30-60	30-60	30-60	30-60	30-60	30-60
NonStop BreakBack	-	-	-	●	●	●	●	●	●
Overrun clutch	●	●	●	●	●	●	●	●	●
Friction clutch	-	-	-	-	-	-	●	●	●
Optional Equipment									
Swath boards (RH / LH)	● / -	● / -	● / -	○ / ○	○ / ○	○ / ○	- / -	- / -	- / -
Swath roller (RH / LH)	○ / -	○ / -	○ / -	○ / -	○ / -	○ / -	● / ○	● / ○	● / ○
High skids +20/+40/+60/+80mm	○	○	○	○	○	○	○	○	○
ProFit quick change of knives	○	○	○	○	○	○	○	○	○
Lighting kit	○	○	○	○	○	○	○	○	○
Throwing wings	○	○	○	○	○	○	○	○	○
Straw divider	-	-	-	-	-	-	○	○	○
Hydraulic ground pressure adj.	-	-	-	-	-	-	-	-	-
Swath forming kit	-	-	-	-	-	-	-	○	○

● Standard equipment
○ Option
- Not available
*) Please note that there is a minimum weight requirement of tractor.

	Centre Mounted Plain Disc Mowers						Front Mounted Plain Disc Mowers			
Model	2828 M	2832 M	2836 M	2840 M	5087 M	5095 M	2828 F	2832 F	2832 FS	2836 F
Dimensions & Weight										
Working width (m/ft)	2.81(9'3")	3.18(10'5")	3.57(11'6")	3.92(12'10")	8.7(28'5")	9.5(31'2")	2.81(9'3")	3.16(10'4")	3.16(10'4")	3.57(11'6")
Weight, approx (kg/lbs)	805(1775)	875(1929)	910(2007)	950(2095)	1315(2900)	1385(3054)	790(1742)	815(1797)	930(2051)	900(1985)
Transport width (m)	2.3	2.3	2.3	2.3	<3.0	<3.0	<3.0	3.0	3.0	3.4
Transport height (m)	2.80	3.25	3.70	3.70	<4.0	<4.0				
Attachment to Tractor										
Linkage (CAT)	2/3	2/3	2/3	2/3	2/3	2/3	2	2	2	2
PTO (rpm)	540/1000	540/1000	540/1000	540/1000	1000	1000	750/1000	750/1000	750/1000	750/1000
Min. PTO power req. (kW/hp)	29 / 40	37 / 50	47 / 65	51 / 70	88 / 120	110 / 150	26 / 35	29 / 40	33 / 45	37 / 50
Operation										
Number of discs and knives	7 / 14	8 / 16	9 / 18	10 / 20	16 / 32	18 / 36	7 / 14	8 / 16	8/16	9/18
Number of hydraulic outlets	1 S	1 S	1 S	1 S	2 D	2 D	1 S	1 S	1 S	1S
Mowing angle °	-15/+15	-15/+15	-15/+15	-15/+15	-15/+15	-15/+15	-17/+17	-17/+17	-17/+17	-17/+17
Stubble height (mm)	30-60	30-60	30-60	30-60	30-60	30-60	30-60	30-60	30-60	30-60
NonStop BreakBack	●	●	●	●	●	●	●	●	●	●
Overrun clutch	●	●	●	●	●	●	●	●	●	●
Friction clutch	●	●	●	●	●	●	-	-	-	-
Optional Equipment										
Swath boards (RH / LH)	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -
Swath roller (RH / LH)	● / ○	● / ○	● / ○	● / ○	○ / ○	○ / ○	○ / ○	○ / ○	○ / ○	○ / ○
High skids +20/40/60/80mm	○	○	○	○	○	○	○	○	○	○
ProFit quick change of knives	○	○	○	○	○	○	○	○	○	○
Lighting kit	○	○	○	○	○	○	○	○	○	○
Throwing wings	○	○	○	○	○	○	○	○	○	○
Straw divider	○	○	○	○	○	○	-	-	-	-
Hydraulic ground pressure adj.	○	○	○	○	○	○	-	-	-	-
Swath forming kit	-	-	○	○	-	-	-	-	-	-

Information provided in this brochure is made for general information purposes only and for worldwide circulation. Inaccuracies, errors or omissions may occur and the information may thus not constitute basis for any legal claim against Kverneland Group. Availability of models, specifications and optional equipment may differ from country to country. Please consult your local dealer. Kverneland Group reserves the right at any time to make changes to the design or specifications shown or described, to add or remove features, without any notice or obligations. Safety devices may have been removed from the machines for illustration purposes only, in order to better present functions of the machines. To avoid risk of injury, safety devices must never be removed. If removal of safety devices is necessary, e.g. for maintenance purposes, please contact proper assistance or supervision of a technical assistant. © Kverneland Group Kerteminde AS

WHEN FARMING MEANS BUSINESS

kverneland.com