

Agromulch®


Tine stubble-breaker



The Professional's Choice



Exclusive technology

Agromulch[®] Silver mounted

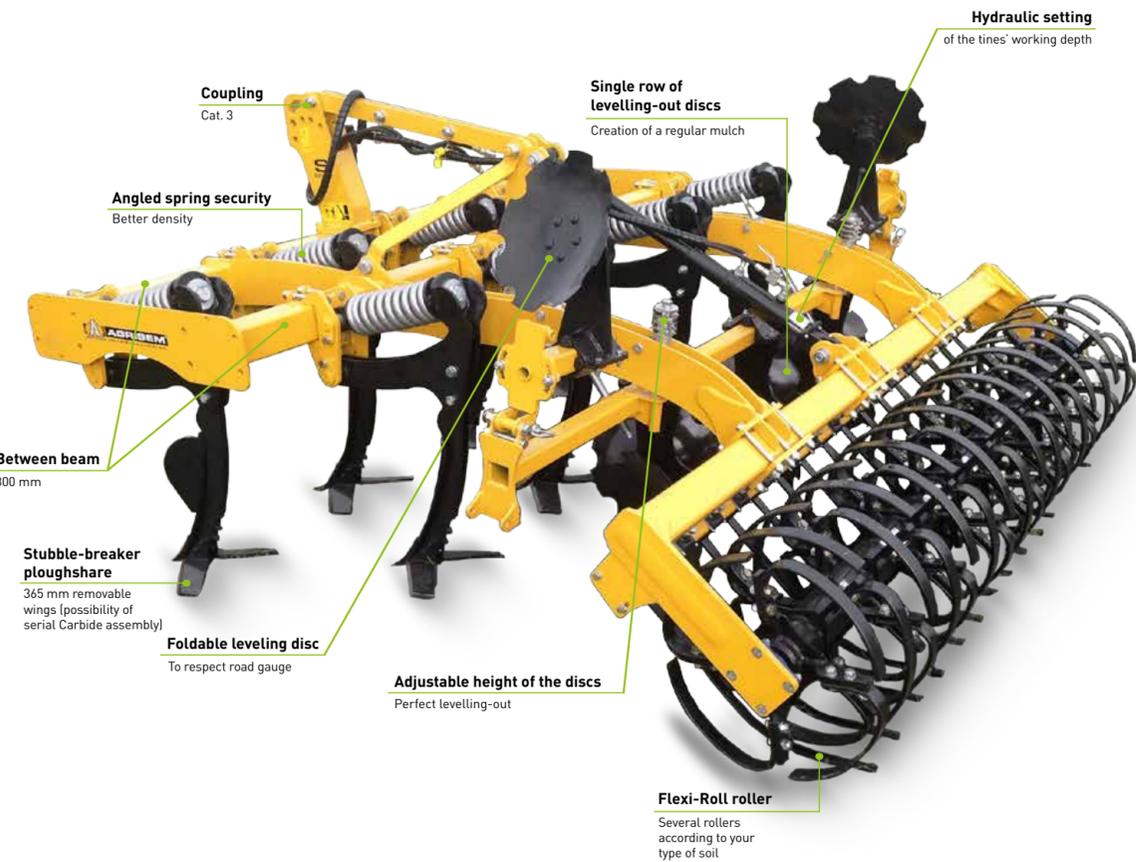


Intensive use all year long
Work up to 25 cm deep From 5 to 12 km/h

Agromulch[®] Gold mounted

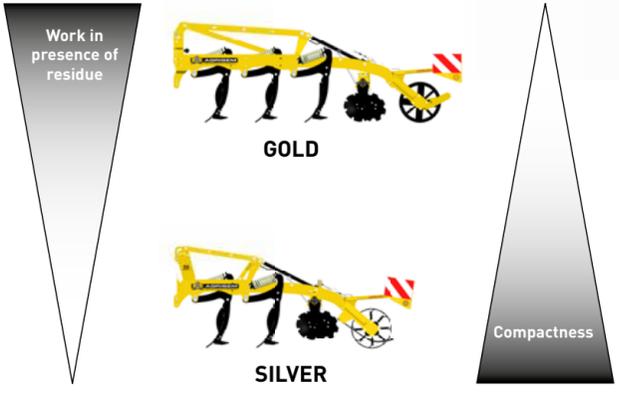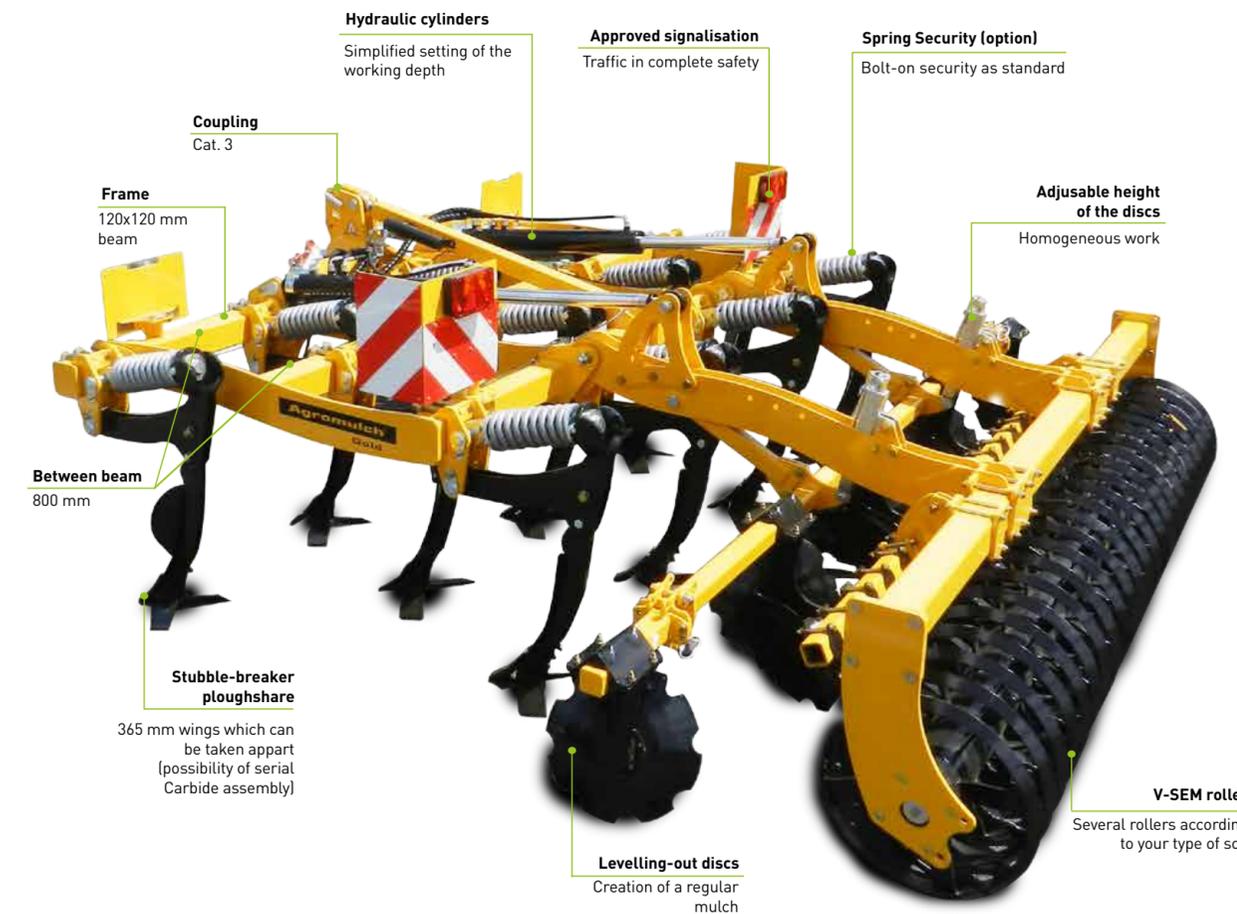

Folding-up of the roller



- Hydraulic folding-up
- Rebalance of the weight during the transport

NEW CARBIDE SHARE

BETEK[®] Carbide technology

Width of the carbide : 80 mm

Carbide wings in option



- 5 to 10 time more longevity
- Regular working quality
- Easy to replace

Spring security



- Release at the tip: + 500 kg of pressure
- Important clearance for the release
- Non stop spring security

Criss-crossing of the wings



- Superficial stubble-breaker after harvest
- Destruction of the crops

Homogeneous work




- Intensive mixing of the crops
- Creation of a regular mulch
- Perfect levelling-out

Levelling-out



- Irreproachable surface
- Improved soil structure
- Facilitated gestion of the crops

Working depth

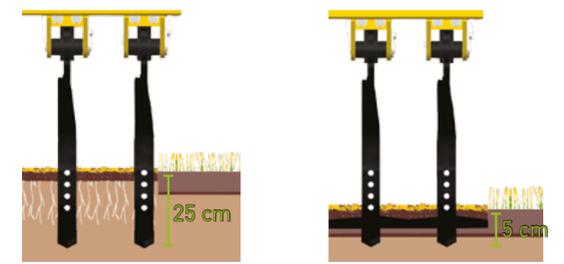


- Without the wings: work at 25 cm deep
- With the wings: work at 5 to 15 cm deep

Exclivity



- 1 machine for 2 fonctions
- Use all year long
- Easy to replace

Agromulch® Gold semi-mounted

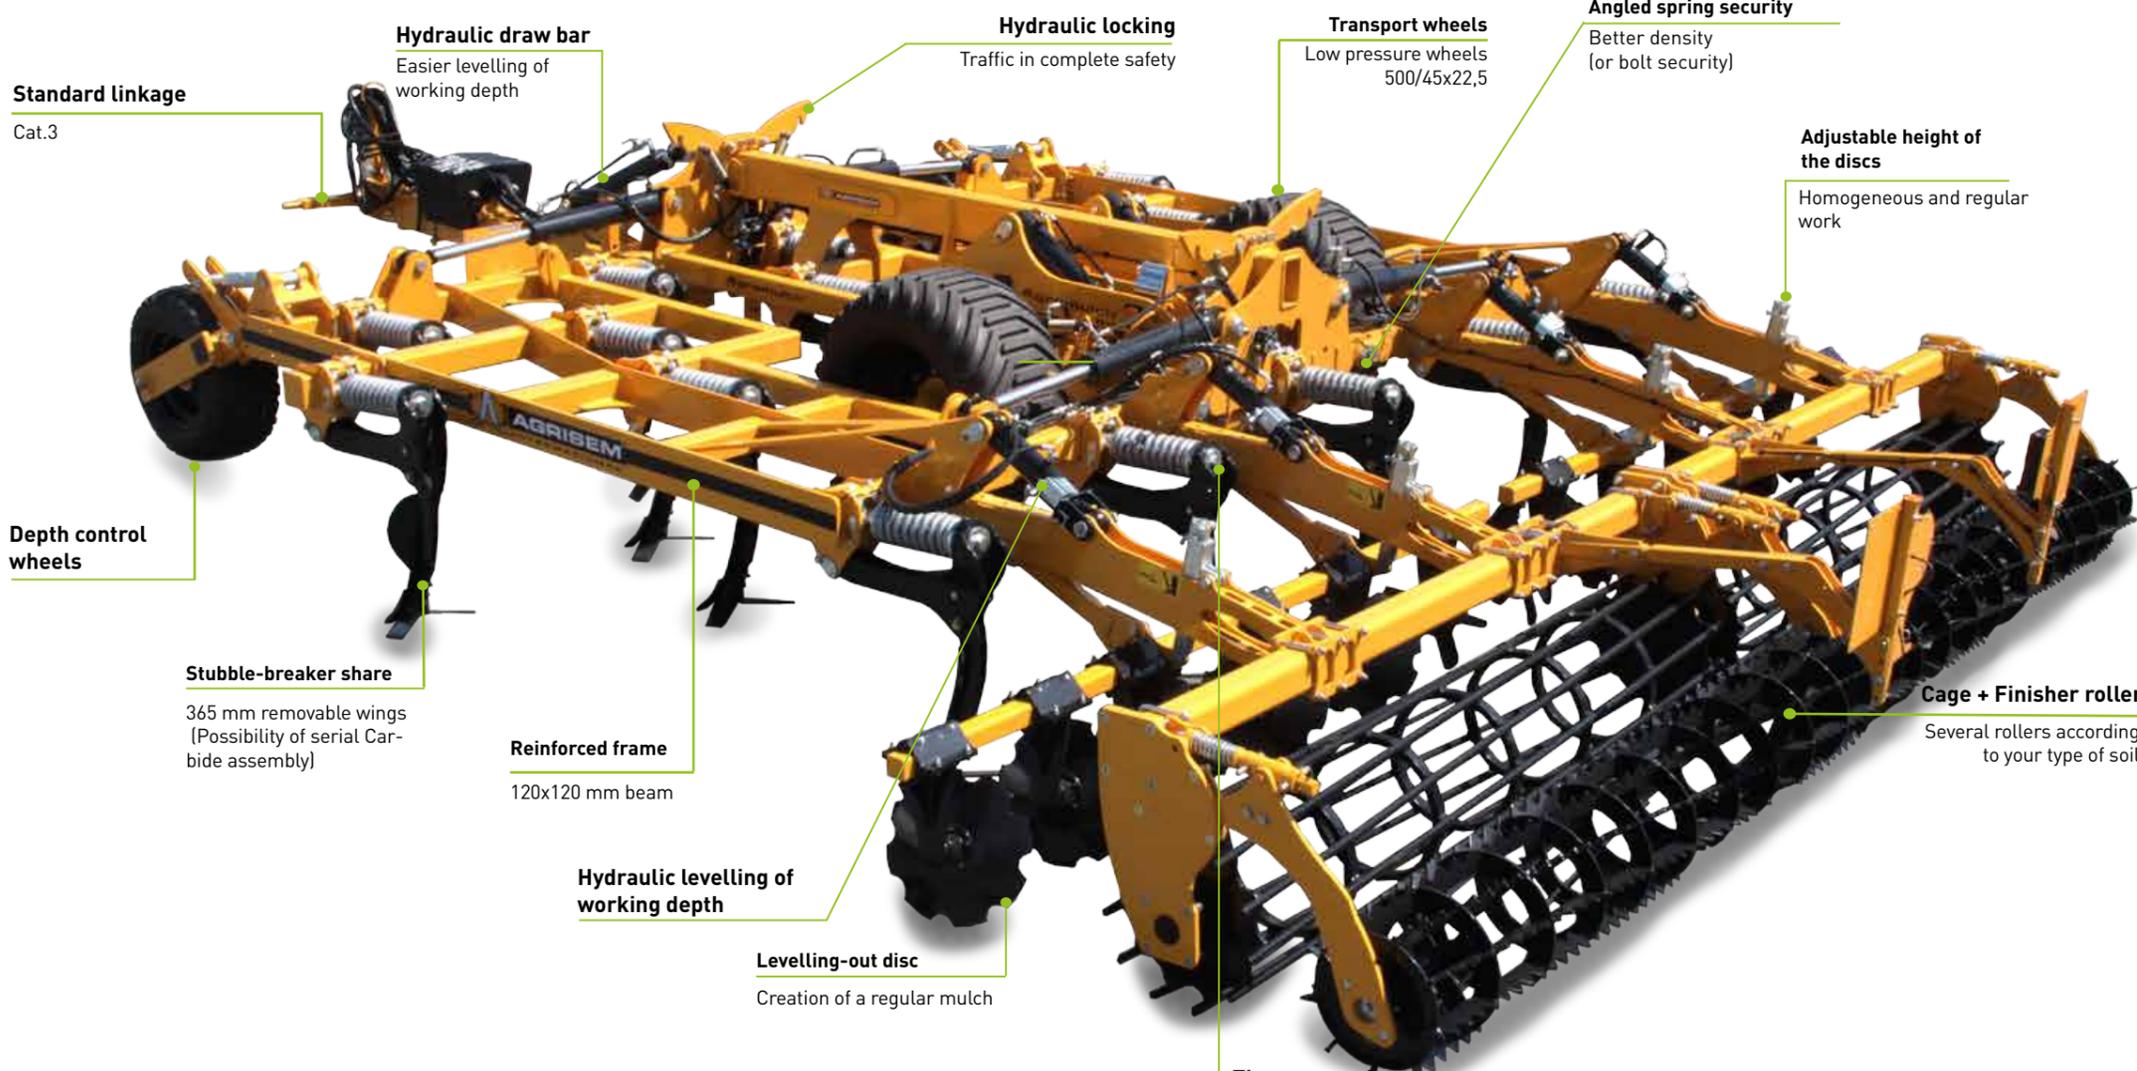

Standard linkage
Cat.3

Hydraulic draw bar
Easier levelling of working depth

Hydraulic locking
Traffic in complete safety

Transport wheels
Low pressure wheels 500/45x22,5

Angled spring security
Better density (or bolt security)

Adjustable height of the discs
Homogeneous and regular work

Depth control wheels

Stubble-breaker share
365 mm removable wings (Possibility of serial Car-bide assembly)

Reinforced frame
120x120 mm beam


Hydraulic levelling of working depth

Levelling-out disc
Creation of a regular mulch

Cage + Finisher roller
Several rollers according to your type of soil

Tine rear each transport wheel
To work without roller in wet condition

ROLLERS

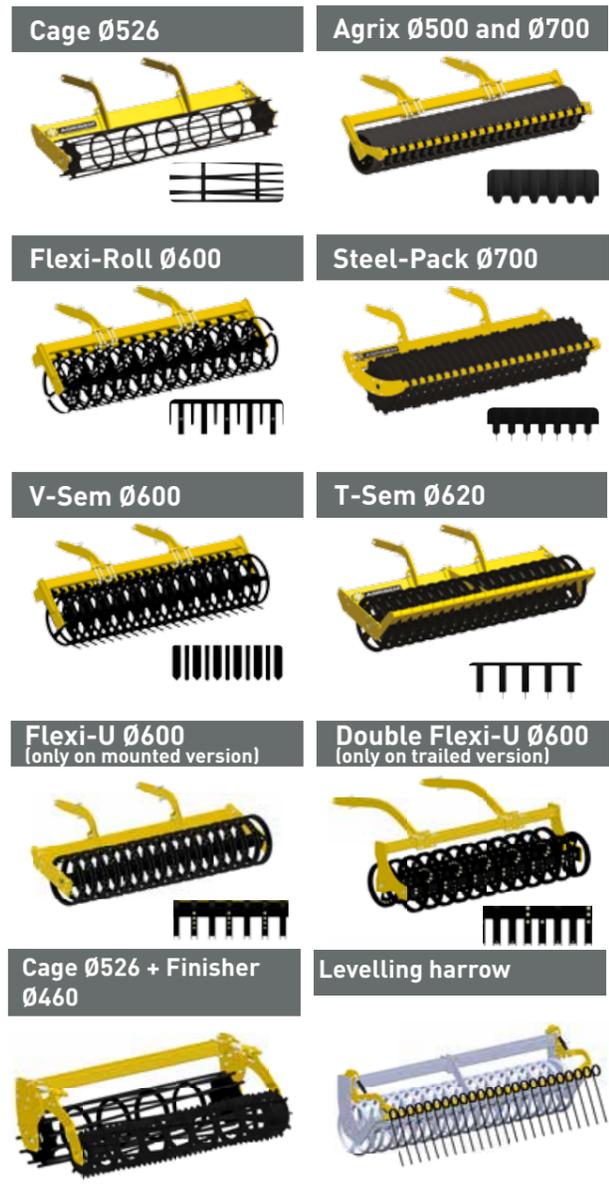

SILVER MOUNTED	Fix versions		Foldable mounted versions	
Working width	3,00	3,50	4,00	5,00
Transport width	3,00	3,50	3,00	3,00
Weight (kg) with Ø 526 cage roller	2 077	2 473	4 772	5 020
Power (ch)	100 - 140	120 - 160	160 - 200	180 - 240
Number of tines	8	10	11	13
Number of Ø460 discs	8	10	12	14

GOLD MOUNTED	Fix mounted versions			Foldable mounted version	
Working width	3,00	3,50	4,00	4,00	5,00
Transport width	3,00	3,50	4,00	3,00	3,00
Weight (kg) with cage roller	1 750	1 882	2 284	2 708	3 170
Power (hp)	140 - 180	160 - 200	170 - 220	180 - 240	220 - 280
Number of tines	10	12	13	13	17
Number of discs Ø460	8	10	12	12	12



GOLD SEMI-MOUNTED	Foldable semi-mounted versions		
Working width	4,00 m	5,00 m	6,00 m
Weight (kg) with cage roller	6 670	7 440	7 790
Power (hp)	200 - 260	240 - 300	280 - 360
Number of tines	13	17	19
Number of discs Ø460	8	10	10



535 rue Pierre Levasseur T. +33 (0)2 51 14 14 40 agrisem@agrisem.com
44158 ANCENIS - FRANCE F. +33 (0)2 40 96 32 36 www.agrisem.com



Your dealer